

MIL-DTL-16377/12 Overhead Lighting

The L.C. Doane Company
311 Series, 3 Lamp Fixture

The 311 Series is a watertight fluorescent lighting fixture for Command Information Center (CIC) lighting. The housing is constructed from marine grade aluminum. The two outside lamps are enclosed in a blue filter tube, and are individually switchable. The black masked lens includes a louver assembly mounted to a clear window opening 120 volts, 60 Hertz. Supplied with three 20W T12 daylight lamps and ten feet of cable.

Standard Mounting

Overall Dimensions: 29-1/4" X 9-9/16" X *5-5/8".
Net weight: *18 lbs. 12 oz. maximum.
Approximate shipping weight for package of three: *61 lbs.

Flush Mounting

Overall Dimensions: 31-5/8" X 11-7/8" X *5-5/8".
Net weight: *20 lbs. 5 oz. maximum.
Approximate shipping weight for package of three: *68 lbs.

*NEALS Emergency Unit

8" overall depth; add 4 pounds per unit, with ten feet of LS7SGU-3 Cable. (Refer to NEALS Catalog Sheet, page 2)

How To Order By Military Spec Number


Example: M16377/12A-341.1 (Refer to the Index pages for crosses to NSN numbers)

M16377	/		-		-	
MIL SPEC NUMBER				SYMBOL NUMBER		OTHER OPTION Specify
		ELECTRICAL RATING		341.1	= Standard Mount clear/black shielded window	
		12A	= (3) Standard Ballasts			
		12B	= (3) High Efficiency Ballasts			
		75	= (3) High Efficiency Ballasts with Additional Emergency Circuit	341.2	= Flush Mount clear/black shielded window	

On Board Repair Parts For MIL-DTL-16377, 3 Lamp Fixtures


For other available on board repair parts refer to the Repair Parts page.

ITEM DESCRIPTION	L.C. DOANE PART NUMBER	MILITARY NUMBER	NSN NUMBER
WINDOW ASSEMBLY	B-1128-ANS	M16377/12-003	6210-00-725-9030
SHOCKMOUNT	B-1591-CS	M16377/41-008	
DAYLIGHT LAMP	P-490-S	MS15589-4	6240-00-152-2993

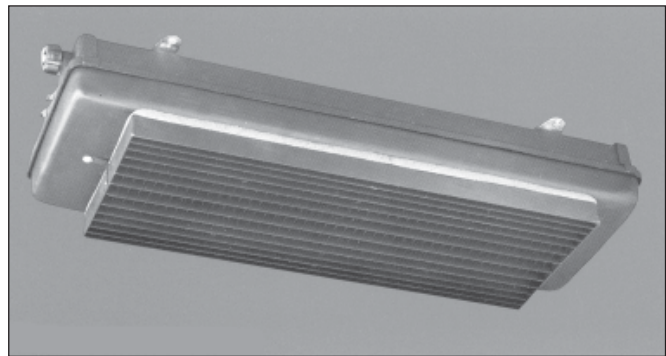

M16377/12-341.1
Standard Mount

NSN 6210-00-455-0068

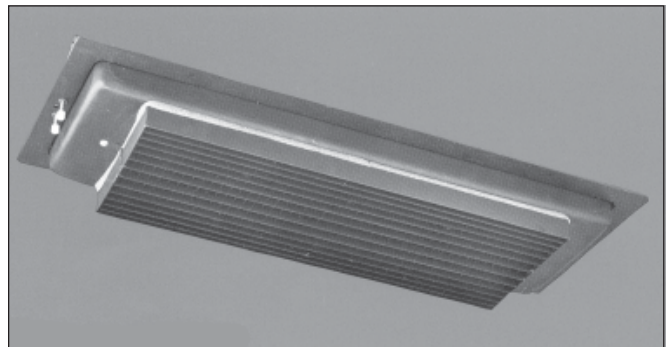

M16377/12-341.2
Flush Mount

NSN 6210-01-107-2581

