

MIL-F-16377/12 Specialized Lighting

The L.C. Doane Company
315 Series, 3 Lamp Fixture


The 315 Series is a watertight fluorescent lighting fixture for passageways in berthing areas. The housing is constructed from marine grade aluminum, with a white diffusing 1/4" thick acrylic window. During normal work hours two outside lamps provide white lighting. For rest period, the center lamp with a red filter tube provides low level red light. The window assembly has a shield and a clear area for center lamp. This provides red light directly below the fixture only.

120 volts, 60 Hertz. Supplied with three T12 cool white lamps and ten feet of cable. DPST toggle switches available upon request.

How To Order By Military Spec Number

Example: M16377/12A-315 (Refer to the Index pages for crosses to NSN numbers)

M16377	/		-		-	
MIL SPEC NUMBER		ELECTRICAL RATING		PART NUMBER		OPTIONAL SWITCH (DPST)
		12A = 20W Lamps		315 = Standard Mount		S = One Switch
		12B = 17W Lamps		315-F = Flush Mount		SS = Two Switch

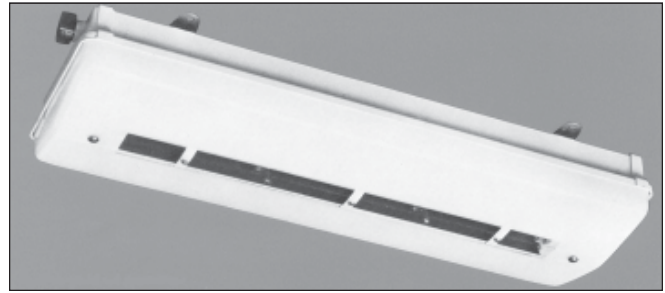

M16377/12A-315

Standard Mount

Standard Mounting

Overall Dimensions: 29-1/4" X 9-9/16" X 4-1/4".

Net weight: 15 lbs. 13 oz. maximum.

Approximate shipping weight for package of four: 70 lbs.

Flush Mounting

Overall Dimensions: 31-5/8" X 11-7/8" X 4-1/4".

Net weight: 18 lbs. 0 oz. maximum.

Approximate shipping weight for package of four: 78 lbs.

On Board Repair Parts For MIL-DTL-16377, 3 Lamp Fixtures

For other available on board repair parts refer to the Repair Parts page.

ITEM DESCRIPTION	L.C. DOANE PART NUMBER	MILITARY NUMBER	NSN NUMBER
WHITE DIFFUSING WINDOW	B-1594-NS		
SHOCKMOUNT	B-1591-BS	M16377/41-009	6210-00-973-1747

