

US NAVY MIL SPEC LIGHTING

MIL-DTL-16377/13 Overhead Lighting

The L.C. Doane Company
600 Series, 3 Lamp Fixture

The 600 Series is a dripproof high output fluorescent light fixture for general lighting. The housing is constructed from die cast .090 marine grade aluminum. Standard with a clear prismatic window.


120 volts, 60 Hertz. Supplied with three 60W T12 cool white lamps, specular reflector and ten feet of cable.

Standard Mounting

Overall Dimensions: 52-1/16" X 14-13/16" X 8-3/16".
Net weight: 60 lbs. 0 oz. maximum.
Approximate shipping weight for individual unit: 67 lbs.


Flush Mounting

Overall Dimensions: 55-9/16" X 17-1/2" X 4-5/16".
Net weight: 67 lbs. 0 oz. maximum.
Approximate shipping weight for individual unit: 72 lbs.

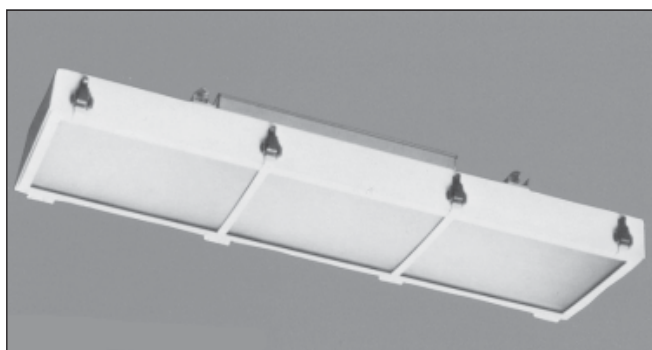

M16377/13-74
Standard Mount

NSN 6310-00-474-5653

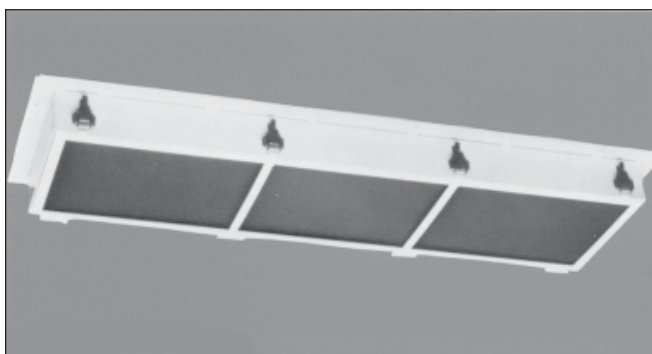

M16377/13-74.1
Flush Mount

How To Order By Military Spec Number

Example: M16377/13-74 (Refer to the Index pages for crosses to NSN numbers)

M16377/13	-		-		-	
MIL SPEC NUMBER		SYMBOL NUMBER		OPTIONAL WINDOW		OTHER OPTION
		74 = Standard Mount		R = Red Prismatic		Specify
		74.1 = Flush Mount		A = Amber Prismatic		
				B = Blue Prismatic		

On Board Repair Parts For MIL-DTL-16377/13, 3 Lamp Fixtures

For other available on board repair parts refer to the Repair Parts page.

ITEM DESCRIPTION	L.C. DOANE PART NUMBER	MILITARY NUMBER	NSN NUMBER
CLEAR PRISMATIC WINDOW	B-1703-SP	M16377/13-001	6210-00-877-8799
RED PRISMATIC WINDOW	B-1748-SP	M16377/13-002	6210-00-902-0228
AMBER PRISMATIC WINDOW	B-1825-SP	M16377/13-003	6210-01-166-7183
BLUE PRISMATIC WINDOW			
LAMPHOLDER	P-1361-AS	UL 542	6250-00-906-8084
BALLAST	B-1828-S	Com'l designation F48T12/HO	6250-00-906-8083
LAMP-WHITE	P-941-S	MS18226-1	6240-00-933-5075
SHOCKMOUNT INTERNAL	B-1669-S	M16377/41-028	
SHOCKMOUNT EXTERNAL	A-1036-JS	M16377/41-026	6210-00-396-1717



THE L.C. DOANE COMPANY DESIGNERS AND MANUFACTURERS OF SPECIALIZED LIGHTING EQUIPMENT
Ivoryton, CT 06442 • (860) 767-8295 • Fax (860) 767-1397 • Web Site: www.lcdoane.com Rev J