



intent

The L.C.Doane 607 series MIL-DTL-16377/57 is designed for general purpose naval lighting in wet maritime environments.

mounting

Mounts flush within suspended ceilings.

light source

Supplied with four T12 fluorescent lamps powered by 120 V, 60 Hz ballasts.

window

0.25 in. thick clear prismatic acrylic window.

housing

Made from sheet aluminum die formed to shape with seams welded and ground smooth.

finish

Polyester powder coated after phosphate pre-treatment for superior adhesion and corrosion resistance.



wiring

Supplied with ten feet of 16/3 cable.

weight

Flush mount (less cable):
25.88 lb. each, maximum



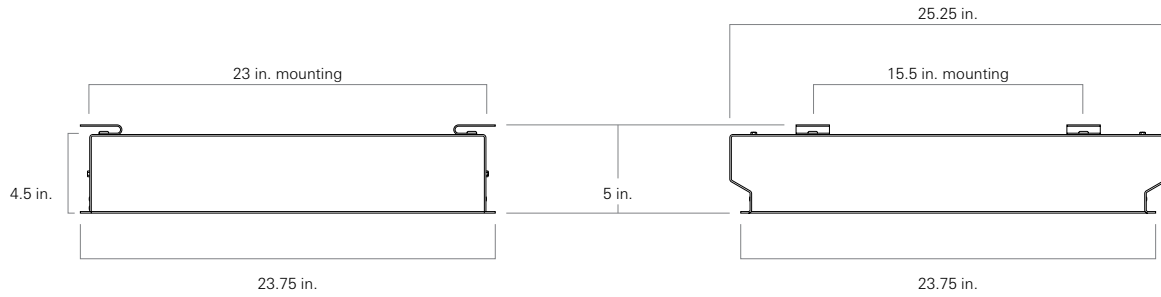

one electrical rating
57A four 20 W lamps
57B four 17 W lamps
76 four 17 W lamps with emergency circuit

two symbol
349 flush mount with clear prismatic window

three optional filter tube for each lamp
B blue
R red
Y amber
G1.0 grey 1.0%
G2.5 grey 2.5%

four other options

replacement item	L.C.Doane number	military number	NSN
clear prismatic window	B-1543-SP	M16377/57-002	6210-00-115-9189
shockmount	B-1591-CS	M16377/41-008	