



## PRODUCT SPECIFICATION

The DS1 series is a unique corner mounted fixture designed for use in all levels of security facilities and high abuse applications.

**Mounting**

Surface mounts to wall or ceiling corner.

**Lens**

One piece prismatic polycarbonate, formed to a seamless wraparound shape to maximize light dispersion.

**Clamshell Housing**

14 gauge cold rolled steel die-formed to shape with seams welded and ground smooth, 14 gauge lens retainers and a full length, welded pin piano hinge. Stainless steel available.

**Back Plate**

16 gauge die-formed cold rolled steel.

**Finish**

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

**Hardware**

Recessed, stainless steel, tamper-proof fasteners.

**Certifications**

UL Listed damp location.





Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

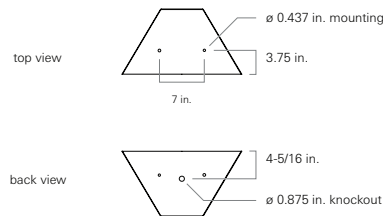

- one Lamps (not included)**  
 13D 13 W 5 in. PL T4 DTT  
 18D 18 W 6 in. PL T4 DTT  
 26 26 W 7 in. PL T4 DTT

- two Housing Material**  
 C Cold rolled steel  
 S Stainless steel

- three Housing Finish**  
 R Brushed stainless steel  
 W White

- four Voltage**  
 120 120 V, 60 Hz  
 277 277 V, 60 Hz  
 347 347 V, 60 Hz  
 VAR Variable, 120-277 V, 50/60Hz

- five Ballast**  
 EL Electronic High Power Factor

- six Lens**  
 15 .156 in. K12 prismatic polycarbonate  
 16 .187 in. K12 prismatic polycarbonate  
 18 .250 in K12 prismatic polycarbonate

- seven Door Fasteners**  
 AP Stainless steel allen head with pin  
 TP Stainless steel torx head with pin  
 PH Phillips, non-security

- eight Options**  
 CU Canadian UL Listing  
 FH Fuse and holder  
 SR Specular reflector

Modifications are available to meet custom requirements.