



PRODUCT SPECIFICATION

The FTD series is designed for use in laminar airflow cleanrooms.

Mounting

Ceiling grid mount.

Lens

Snap-in extruded, ribbed prismatic pattern acrylic lens. Available in clear and opal.

Housing

18 gauge cold rolled steel die-formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

Electrical

Electrical components are mounted to a removable power tray for ease of installation and maintenance.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Certifications



UL Listed wet location. Suitable for use in ISO 5 cleanrooms (209E Class 100).

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

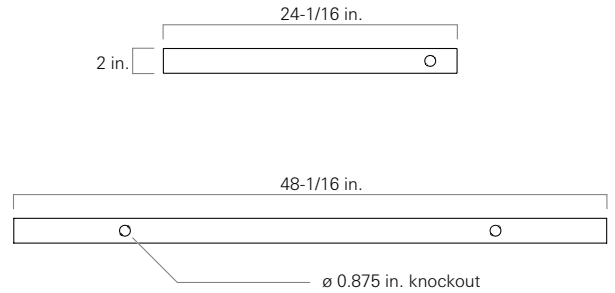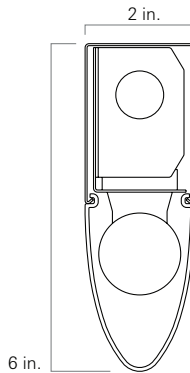

one Lamps (Not Included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24W T5 HO
- 4B 2 ft. 40 W T5 biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

two Lens

- CL Clear diffuser
- WH White diffuser

three Material

- A Aluminum
- C Cold rolled steel, standard
- S Stainless steel

four Finish

- R Brushed stainless steel
- W White

five Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

six Ballast

- DM Dimming
- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

seven Options

- CU Canadian UL Listing
- E1 One lamp emergency ballast
- FH Fuse and holder

Modifications are available to meet custom requirements.