



PRODUCT SPECIFICATION

The GTO series is designed for use in all levels of security facilities and high abuse applications.

**Mounting**

Mounts recessed in 1 in. T-grid ceiling. Knockouts for earthquake cable supports provided.

**Housing**

18 gauge die-formed cold rolled steel with seams welded and ground smooth.

**Door**

One piece, die formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

**Finish**

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel door available.

**Hardware**

Recessed, stainless steel, tamper-proof fasteners.

**Wiring**

All electrical components are reflector-mounted for easy wiring and maintenance. Access plate with two .875 in. diameter knockouts.

**Certifications**



UL Listed wet location

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

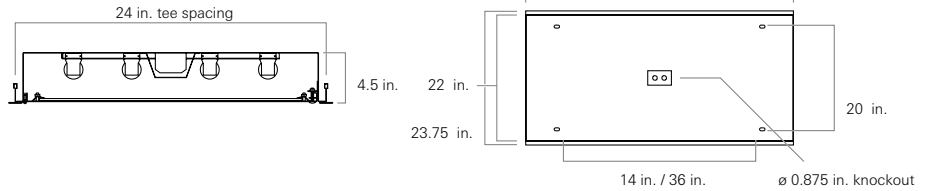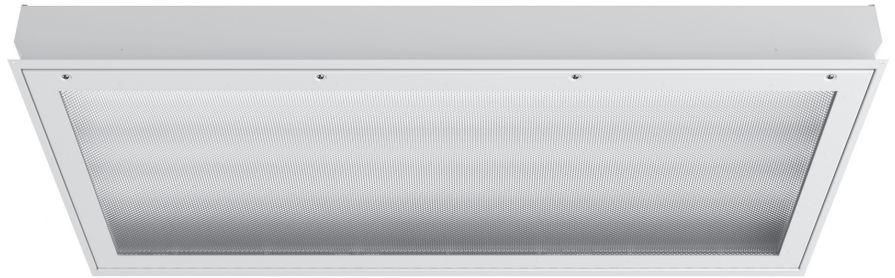

GTO	one	two	three	four	five	six	seven	eight	nine	ten	eleven
-----	-----	-----	-------	------	------	-----	-------	-------	------	-----	--------

- one Lamps (not included)**
- 14 2 ft. 14 W T5
  - 17 2 ft. 17 W T8
  - 24 2 ft. 24 W T5 HO
  - 4B 2 ft. 40 W T5 RS biax
  - 28 4 ft. 28 W T5
  - 32 4 ft. 32 W T8
  - 54 4 ft. 54 W T5 HO

- two Lamp Quantity**
- 2 Two
  - 3 Three
  - 4 Four
  - 6 Six

- three Door Gauge**
- N 18 gauge, minimum security
  - D 16 gauge, medium security
  - X 14 gauge, maximum security
  - U 12 gauge, super max, CRS only

- four Door Material**
- C Cold rolled steel
  - S Stainless steel

- five Finish**
- R Brushed stainless steel
  - W White
- six Voltage**
- 120 120 V, 60 Hz
  - 277 277 V, 60 Hz
  - 347 347 V, 60 Hz
  - VAR Variable, 120-277 V, 50/60Hz

- seven Ballast**
- DM Dimming
  - EL Electronic Instant Start, std T8
  - PR Program Rapid Start, std T5, option T8

- eight Internal Lens**
- 53 .125 in. K12 prismatic acrylic
  - 12 .125 in. K12 prismatic polycarbonate
  - 15 .156 in. K12 prismatic polycarbonate
  - 16 .187 in. K12 prismatic polycarbonate
  - 75 .156 in. C73 prismatic tempered glass
  - 01 .005 in. UV absorbing overlay

- nine External Lens**
- 30 .187 in. clear polycarbonate
  - 32 .250 in. clear polycarbonate
  - 36 .375 in. clear polycarbonate
  - 38 .500 in. clear polycarbonate
  - 90 .187 in. clear tempered glass
  - 92 .250 in. clear tempered glass
  - 96 .375 in. clear tempered glass

- ten Fasteners**
- AP Stainless steel allen head with pin
  - TP Stainless steel torx head with pin
  - PH Phillips, non-security

- eleven Options**
- 2C Two-circuit wired
  - CU Canadian UL Listing
  - E1 One lamp emergency ballast
  - E2 Two lamp emergency ballast
  - FH Fuse and holder
  - NL Night light, for 7 or 9 W PL bipin
  - NL-LED Night light, LED
  - IMS Integral Occ Sensor

Consult factory for 14 and 16 gauge CRS and SS housings.

Modifications are available to meet custom requirements.