



## PRODUCT SPECIFICATION

The GTON series is designed for use in all levels of security facilities and high abuse applications.

### Mounting

Mounts recessed in 1 in. T-grid ceiling. Knockouts for earthquake cable supports provided.

### Housing

18 gauge die-formed cold rolled steel with seams welded and ground smooth.

### Door

One piece, die formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel door available.

### Hardware

Recessed, stainless steel, tamper-proof fasteners.

### Wiring

Access plate with two .875 in. diameter knockouts.

### Certifications



UL Listed wet location

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

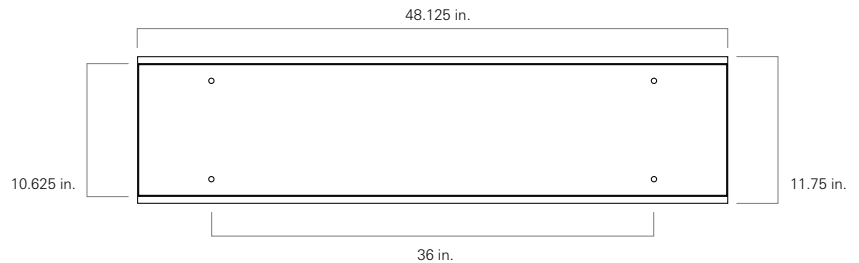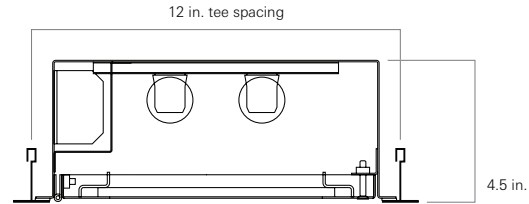

GTON	one	two	three	four	five	six	seven	eight	nine	ten	eleven
------	-----	-----	-------	------	------	-----	-------	-------	------	-----	--------

#### one Lamps (not included)

- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

#### two Lamp Quantity

- 1 One
- 2 Two
- 3 Three

#### three Door Gauge

- N 18 gauge, minimum security
- D 16 gauge, medium security
- X 14 gauge, maximum security
- U 12 gauge, super max, CRS only

#### four Door Material

- C Cold rolled steel
- S Stainless steel

#### five Finish

- R Brushed stainless steel
- W White

#### six Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

#### seven Ballast

- DM Dimming
- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

#### eight Internal Lens

- 53 .125 in. K12 prismatic acrylic
- 12 .125 in. K12 prismatic polycarbonate
- 15 .156 in. K12 prismatic polycarbonate
- 16 .187 in. K12 prismatic polycarbonate
- 75 .156 in. C73 prismatic tempered glass
- 01 .005 in. UV absorbing overlay

#### nine External Lens

- 30 .187 in. clear polycarbonate
- 32 .250 in. clear polycarbonate
- 36 .375 in. clear polycarbonate
- 38 .500 in. clear polycarbonate
- 90 .187 in. clear tempered glass
- 92 .250 in. clear tempered glass
- 96 .375 in. clear tempered glass

#### ten Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

#### eleven Options

- 2C Two-circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- FH Fuse and holder
- NL Night light, for 7 or 9 W PL bipin
- NL-LED Night light, LED
- IMS Integral Occ Sensor

Consult factory for 14 and 16 gauge CRS and SS housings.

Modifications are available to meet custom requirements.