



PRODUCT SPECIFICATION

The HGA series is designed for dust-free operation in surgical suites where maximum illumination is required in the operating zone.

Mounting

Mounts recessed in 1 to 1.5 in. T grid ceilings. Knockouts for earthquake cable supports provided.

Lens

Asymmetric / Symmetric acrylic lens with grounded RFI grid.

Housing

18 gauge cold rolled steel die-formed to shape with ends welded and ground smooth.

Door

One-piece 18 gauge cold rolled steel, gasketed and sealed overlapping door. Full length adjustable brackets secure the lens to the door. Aluminum and stainless steel available.

Finish

Antimicrobial white powder-coat applied after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel door available.

Hardware

Stainless steel fasteners.

Certifications




UL Listed wet location and IP65 rated. Suitable for use in ISO 5 cleanrooms (209E Class 100).

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

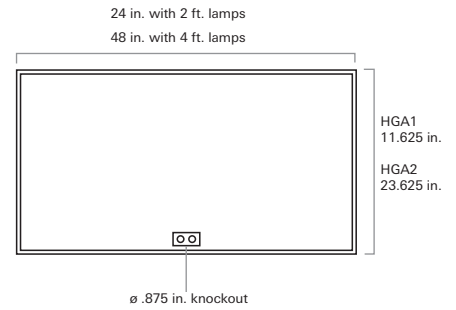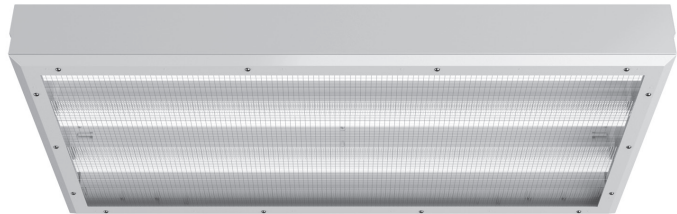

<p>one Luminaire Width</p> <p>1 1 ft., <u>three lamp max., 1 x 4 only</u></p> <p>2 2 ft.</p> <p>two Lamp Quantity</p> <p>2 two</p> <p>3 three</p> <p>4 four</p> <p>6 six</p> <p>three Lamps (not included)</p> <p>14 2 ft. 14 W T5</p> <p>17 2 ft. 17 W T8</p> <p>24 2 ft. 24 W T5 HO</p> <p>28 4 ft. 28 W T5</p> <p>32 4 ft. 32 W T8</p> <p>54 4 ft. 54 W T5 HO</p>	<p>four Ballast</p> <p>DM Dimming</p> <p>EL Electronic Instant Start, <u>standard for T8</u></p> <p>PR Program Rapid Start, <u>standard for T5, option for T8</u></p> <p>five Voltage</p> <p>120 120 V, 60 Hz</p> <p>277 277 V, 60 Hz</p> <p>347 347 V, 60 Hz</p> <p>VAR Variable, 120-277 V, 50/60Hz</p> <p>six Door Material</p> <p>A Aluminum</p> <p>C Cold rolled steel, <u>standard</u></p> <p>S Stainless steel</p>	<p>seven Door Finish</p> <p>R Brushed stainless steel</p> <p>W White</p> <p>eight Lens</p> <p>117 .150 in. asymmetric/symmetric acrylic with RF grid, <u>standard. 3 lamp min., 2-ft width only</u></p> <p>113 .125 in. K12 prismatic acrylic with RF grid.</p> <p>nine Options</p> <p>2C Two-circuit wired</p> <p>CU Canadian UL Listing</p> <p>E1 One lamp emergency ballast</p> <p>E2 Two lamp emergency ballast</p> <p>FH Fuse and holder</p> <p>NL Night light, for 7 W or 9 W PL bipin</p> <p>NL-LED Night light, LED</p> <p>RF Radio interference filter, one per circuit</p>
---	--	---

Modifications are available to meet custom requirements.