



## PRODUCT SPECIFICATION

The LPCW series is designed for general purpose lighting in high abuse environments.

### Mounting

Surface mounts to walls.

### Lens

Vandal resistant, injection molded, UV stabilized, prismatic polycarbonate lens.

### Housing

Cold rolled steel die formed to shape with seams welded and ground smooth.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

### Hardware

Stainless steel, tamper-proof fasteners.

### Wiring

Wire access is provided for wall and surface conduit. The reflector-mounted electrical assembly is outfitted with a quick disconnect plug to facilitate wiring.

### Certifications



UL Listed wet location. Covered ceilings only.

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

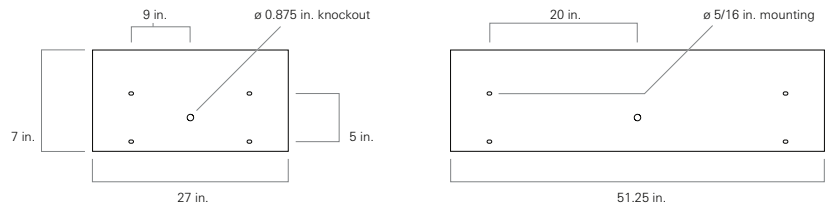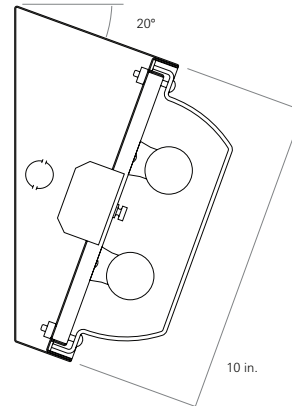

### one Lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 Biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

### two Lamp Quantity

- 2 Two
- 3 Three

### three Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

### four Ballast

- DM Dimming
- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

### five Lens Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

### six Electrical Access

- A 2.250 in. diameter access hole
- K 0.875 in. diameter knockout(s), std

### seven UL Listing

- W Wet location

### eight Finish

- W White

### nine Options

- 2C Two-circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- FH Fuse and holder
- LL Lamp locks for T8 lamps
- NL Night light, for 7 or 9 W PL bipin
- NL-LED Night light, LED

Consult factory for aluminum or 14 - 18 gauge CRS and stainless steel