

M100R Series Fluorescent Light Fixture

Designed and constructed for commercial marine and wet location recessed mount ceiling applications. The design is drip-proof and easy to install and service. Constructed from marine grade aluminum with an acrylic lens.



Housing Manufactured of die formed aluminum with continuously welded seams and liquid tight cord grip.

Lens Prismatic acrylic.

Lens Frame Seamless extruded aluminum frame with piano hinge and spring loaded quarter-turn fasteners.

Lamp Holders Vibration resistant spring loaded medium bi-pin lamp holders keep lamps securely in position.

Finish White, powder coat polyester, inside and out, phosphate pretreated to ensure superior adhesion and corrosion resistance.

Ballast Standard universal 120-277 VAC, 50/60 Hz, electronic ballast. Consult factory for other options.

Features

- » 2' or 4' fixture lengths
- » 1, 2, or 3 lamp combination
- » Drip-proof
- » UL 1598A marine
- » IP 23 (IP 55 with gasket option)
- » U.S.C.G. - ABS


Applications


- » Narrow places
- » Passageways
- » Work stations

Dimensions *dimensions and specifications subject to change without notification*

Weight: 4 ft. = 20 lbs. (9.1 kg)

2 ft. = 13 lbs. (5.9 kg)

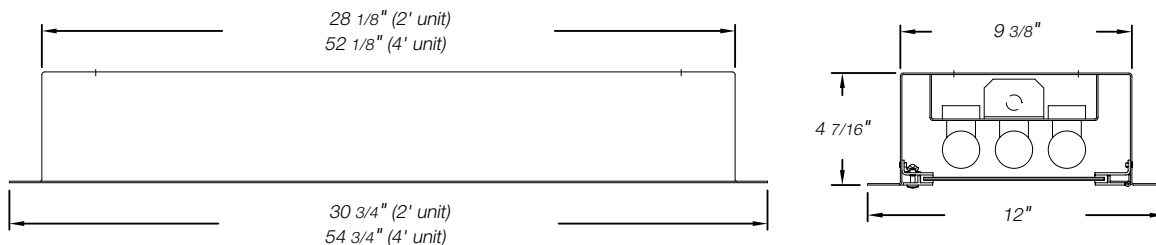



1 Lamp type

17	<i>17W T8, (2 ft)</i>
28	<i>28W T5, (4 ft)</i>
32	<i>32W T8, (4 ft)</i>
54	<i>54W T5, (4 ft)</i>

2 Lamp quantity

1	<i>One</i>
2	<i>Two</i>
3	<i>Three</i>

Options

2C	<i>Two circuit wired</i>
E1	<i>One lamp emergency service</i>
DC	<i>12-24 Volt DC</i>
GA	<i>Gasketing for IP 55 rating</i>
SJO	<i>10' of 16/3 cable, pre-wired</i>