


## M2 Series Fluorescent Light Fixture

The M2 Series is designed for surface mounted use. Constructed from glass reinforced polyester, with an acrylic diffuser.

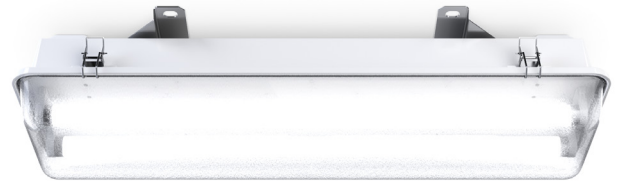

**Housing** One piece high impact white glass reinforced polyester, fire resistant material. Housing features a factory installed cable access stuffing tube.

**Reflector** A one piece high reflectance electrical component mounting tray, secured with thumbscrews for tool-less access to ballast and wiring. Vibration resistant, spring loaded, bi-pin lamp holders.

**Lens** One piece impact resistant clear textured acrylic seated against a seamless, poured-in-place gasket.

**Lens Retention** Quick release tool-less, molded celcon or stainless steel catches.

**Mounting** Zinc plated, corrosion resistant, shock resistant brackets. Stainless steel brackets are also available.

**Ballast** Standard universal 120-277 VAC, 50/60 Hz, electronic ballast (consult factory for other options).

### Features

- » 2' or 4' fixture lengths
- » 1, 2, or 3 lamp combination
- » Drip-proof
- » UL 1598A marine
- » IP 65
- » U.S.C.G. - ABS


### Applications


- » High moisture areas
- » Work stations
- » Passageways
- » Oil platforms
- » Processing plants
- » Engine rooms

### Dimensions *dimensions and specifications subject to change without notification*

Weight: 4 ft. with electronic ballast = 10 lbs. (4.5 kg)

2 ft. with electronic ballast = 6 lbs. (2.7 kg)

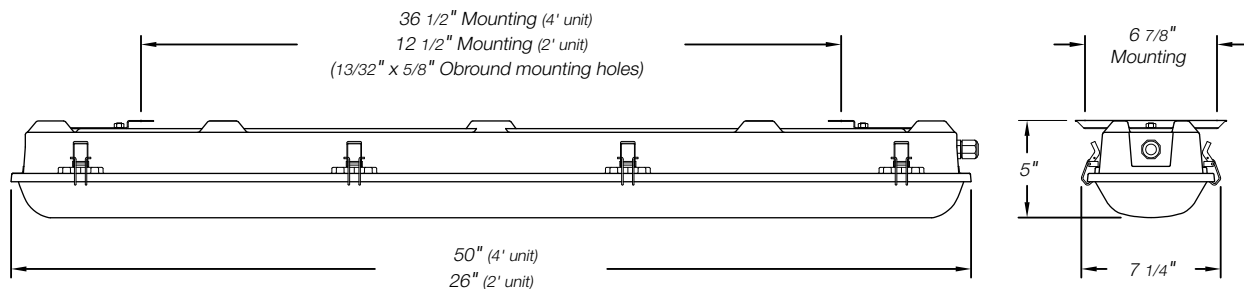



**1 Lamp type**

<b>14</b>	14W T5, (2 ft)
<b>17</b>	17W T8, (2 ft)
<b>24</b>	24W HO T5, (2 ft)
<b>28</b>	28W T5, (4 ft)
<b>32</b>	32W T8, (4 ft)
<b>54</b>	54W HO T5, (4 ft)

**2 Lamp quantity**

<b>1</b>	One
<b>2</b>	Two
<b>3</b>	Three (available with 14W T5 (2 ft), 28W T5 (4 ft) and 32W T8 (4 ft))

**Options**

<b>E1</b>	One lamp emergency service
<b>2ST</b>	2 Stuffing tubes, one each end
<b>SJO</b>	10' of 16/3 cable, pre-wired
<b>2C</b>	Two circuit wired
<b>DC</b>	12/24 Volt DC
<b>SL</b>	Stainless steel lens retention
<b>SM</b>	Stainless steel mounting feet
