


M2 Series Fluorescent Light Fixture

The M2 Series is designed for surface mounted use. Constructed from glass reinforced polyester, with an acrylic diffuser.

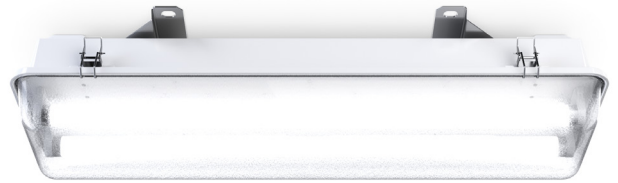

Housing One piece high impact white glass reinforced polyester, fire resistant material. Housing features a factory installed cable access stuffing tube.

Reflector A one piece high reflectance electrical component mounting tray, secured with thumbscrews for tool-less access to ballast and wiring. Vibration resistant, spring loaded, bi-pin lamp holders.

Lens One piece impact resistant clear textured acrylic seated against a seamless, poured-in-place gasket.

Lens Retention Quick release tool-less, molded celcon or stainless steel catches.

Mounting Zinc plated, corrosion resistant, shock resistant brackets. Stainless steel brackets are also available.

Ballast Standard universal 120-277 VAC, 50/60 Hz, electronic ballast (consult factory for other options).

Features

- » 2' or 4' fixture lengths
- » 1, 2, or 3 lamp combination
- » Drip-proof
- » UL 1598A marine
- » IP 65
- » U.S.C.G. - ABS


Applications


- » High moisture areas
- » Work stations
- » Passageways
- » Oil platforms
- » Processing plants
- » Engine rooms

Dimensions *dimensions and specifications subject to change without notification*

Weight: 4 ft. with electronic ballast = 10 lbs. (4.5 kg)

2 ft. with electronic ballast = 6 lbs. (2.7 kg)

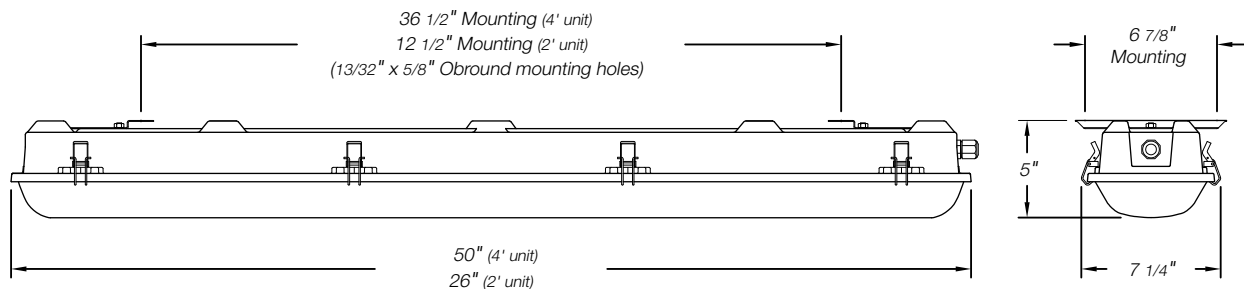



1 Lamp type

14	14W T5, (2 ft)
17	17W T8, (2 ft)
24	24W HO T5, (2 ft)
28	28W T5, (4 ft)
32	32W T8, (4 ft)
54	54W HO T5, (4 ft)

2 Lamp quantity

1	One
2	Two
3	Three (available with 14W T5 (2 ft), 28W T5 (4 ft) and 32W T8 (4 ft))

Options

E1	One lamp emergency service
2ST	2 Stuffing tubes, one each end
SJO	10' of 16/3 cable, pre-wired
2C	Two circuit wired
DC	12/24 Volt DC
SL	Stainless steel lens retention
SM	Stainless steel mounting feet
