

M2SW Series Fluorescent Light Fixture

The M2SW series is designed for surface mounted use in outdoor areas exposed to saltwater. It is constructed from glass reinforced polyester and has an acrylic diffuser.



Housing One piece high impact white glass reinforced polyester, fire resistant material. Housing features a factory installed cable access stuffing tube.

Reflector A one piece high reflectance electrical component mounting tray, secured with thumbscrews for tool-less access to ballast and wiring. Vibration resistant, spring loaded, bi-pin lamp holders.

Lens One piece impact resistant clear textured acrylic lens seated against a seamless, poured-in-place gasket.

Lens Retention Quick release clamping rails make for easy, tool-less access to lamps and electrical components.

Mounting Stainless steel or white polyester powder coat steel mounting feet.

Ballast Standard universal 120-277 VAC, 50/60 Hz, electronic ballast. Consult factory for other options.

Features


- » 2' or 4' fixture lengths
- » 1, 2, or 3 lamp combination
- » Outdoor saltwater rated
- » UL 1598A marine
- » UL 924 emergency lighting
- » IP 66
- » U.S.C.G. - ABS


Applications

- » High moisture areas
- » Shipyards
- » Oil platforms
- » Processing plants
- » Places frequently hosed down

Dimensions *dimensions and specifications subject to change without notification*

Weight: 4 ft. with electronic ballast = 14 lbs. (6.4 kg)
2 ft. with electronic ballast = 8.0 lbs. (3.6 kg)

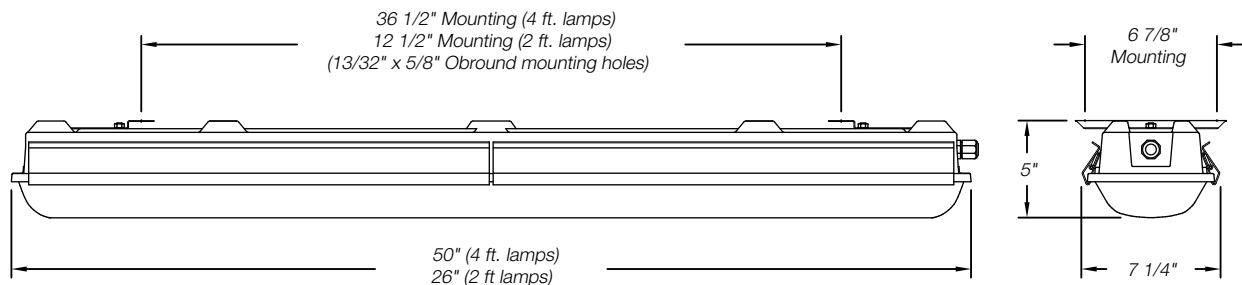



1 Lamp type

14	14W T5, (2 ft)
17	17W T8, (2 ft)
24	24W HO T5, (2 ft)
28	28W T5, (4 ft)
32	32W T8, (4 ft)
54	54W HO T5, (4 ft)

2 Lamp quantity

1	One
2	Two
3	Three (available with 14W T5 (2 ft), 28W T5 (4 ft) and 32W T8 (4 ft))

Options

E1	One lamp emergency service
2ST	2 Stuffing tubes, one each end
SJO	10' of 16/3 cable, prewired
2C	Two circuit wired
DC	12/24 Volt DC
SM	Stainless steel mounting feet