



# M3HL

Hazardous Location and Marine Fluorescent Surface Mount Ceiling

## PRODUCT SPECIFICATION

The M3(HL) is designed for use in marine, industrial and hazardous location environments.

### Mounting

Surface mounts to ceilings via zinc-plated, corrosion and shock-resistant brackets.

### Lens

Impact resistant, clear textured acrylic held in place with quick release spring brackets.

### Housing

16 gauge marine grade sheet aluminum die-formed to shape with cast aluminum ends.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

### Wiring

Reflector-mounted electrical components for easy wiring and maintenance accessed via quarter turn thumb screws.

### Weight

2 ft fixture - 14 lbs  
4 ft fixture - 24 lbs

### Certifications



UL 844 and UL 1598 marine listed. IP 65 rated. T3C operating temperature rated. -20 C to 40 C ambient temperature rated. Certified for class 1 division 2 location groups A, B, C, and D.

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

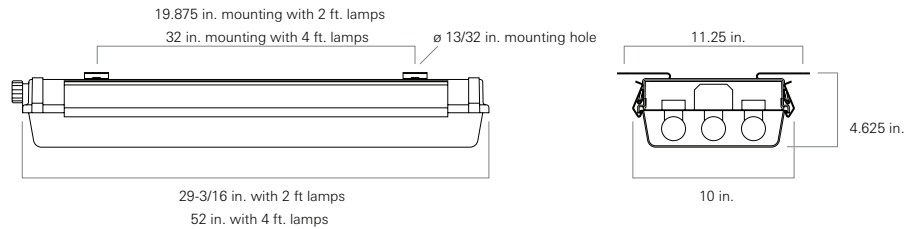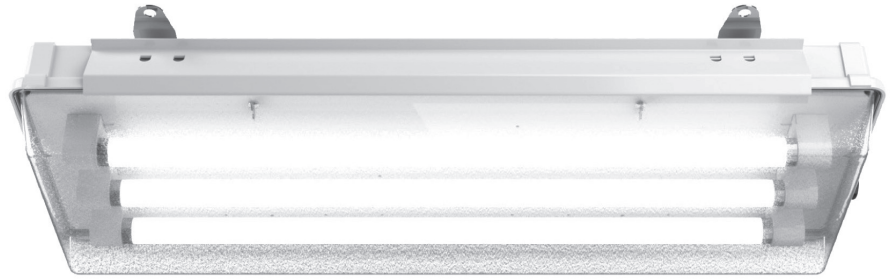

- one Lamps (not included)**
- 17 2 ft. 17 W T8
  - 28 4 ft. 28 W T5
  - 32 4 ft. 32 W T8
  - 54 4 ft. 54 W T5 HO

- two Lamp Quantity**
- 1 One
  - 2 Two
  - 3 Three

- three Ballast**
- EL Electronic Instant Start, std T8
  - PR Program Rapid Start, std T5, option T8
- four Voltage**
- VAR Variable, 120-277 V, 50/60Hz

- five Certification**
- HL Class 1 division 2

- six Options**
- 2C Two circuit wired
  - 2ST two stuffing tubes, one each end
  - DC 12/24 V DC
  - SJO 10 ft. of 16/3 cable, prewired
  - WG Wire guard

Modifications are available to meet custom requirements.