



# M450

Marine Surface Mount Wall Fluorescent

## PRODUCT SPECIFICATION

The M450 series is designed for berth and bunk lighting in seaborne vessels and offshore platforms.

### Mounting

Surface-mounts to bulkheads.

### Electrical

Fluorescent lamps (not included) powered by 120-277V 50/60Hz electronic ballast.

### Lens

Extruded, impact-resistant, white acrylic lens.

### Housing

Extruded aluminum housing with die-cast ends.

### Finish

Polyester powder-coated after phosphate pre-treatment for superior adhesion and corrosion resistance.

### Wiring

Available with a single receptacle outlet and lighted switch.

### Certifications



IP 20 rated. USCG ABS approved. UL 1598A marine listed.

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

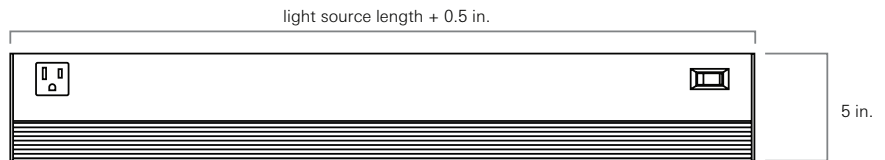

### one Lamp Wattage / Length

- 8 12 in. 8W T5, two lamps
- 15 18 in. 15W T8, one lamp
- 36 18 in. 36W T5 biax, one lamp
- 13 21 in. 13W T5, two lamps
- 14 24 in. 14W T5, two lamps
- 17 24 in. 17W T8, one lamp
- 24 24 in. 24W T5 HO, one lamp
- 32 48 in. 32W T8, one lamp

### two Options

- CO Convenience outlet
- SW Switch
- USB USB Charging Port

Modifications are available to meet custom requirements.