

M607 Series Fluorescent Light Fixture

The M607 Series is a drip-proof fluorescent light fixture for recessed "T" grid ceiling applications. Constructed from marine grade aluminum with an acrylic diffuser.



Housing Die formed aluminum with welded seams.

Lens Prismatic acrylic.

Lens frame Seamless extruded aluminum with piano hinge and spring loaded quarter turn closure fasteners.

Finish White, powder coat polyester, inside and out, phosphate pretreated to ensure superior adhesion and rust resistance.

Ballast Standard universal 120-277 VAC, 50/60 Hz, electronic ballast (consult factory for other options).

Mounting Includes shock resistant brackets and liquid tight cord grip.

Features

- » 2' or 4' fixture lengths
- » 2, 3, or 4 lamp combination
- » Drip-proof recessed light fixture
- » UL 1598A marine
- » IP 54
- » U.S.C.G. - ABS



Applications


- » "T" grid ceilings
- » Accommodations
- » Large open areas
- » Passageways
- » Work stations

Dimensions *dimensions and specifications subject to change without notification*

Weight: 4 ft. with electronic ballast = 30 lbs. (13.6 kg)

2 ft. with electronic ballast = 19 lbs. (8.6 kg)

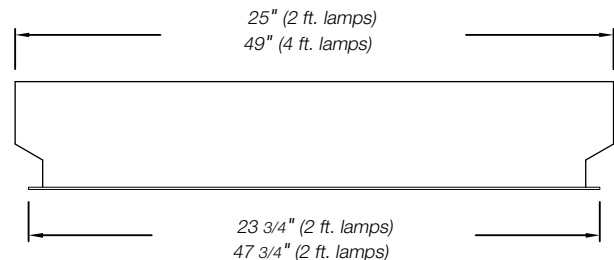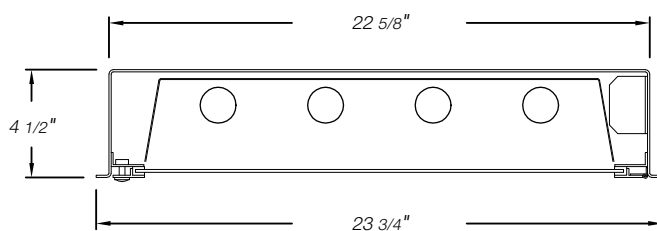



1 Lamp type

17	<i>17W T8, (2 ft)</i>
28	<i>28W T5, (4 ft)</i>
32	<i>32W T8, (4 ft)</i>
54	<i>54W T5 HO, (4 ft)</i>

2 Lamp quantity

2	<i>Two</i>
3	<i>Three</i>
4	<i>Four</i>

Options

E1	<i>One lamp emergency service</i>
E2	<i>Two lamp emergency service</i>
SJO	<i>10' of 16/3 cable, pre-wired</i>
DC	<i>12/24 Volt DC</i>
2C	<i>Two circuit wired</i>
