

## M608 Series Fluorescent Light Fixture

The M608 Series is a drip-proof fluorescent light fixture for recessed "T" grid ceiling applications. Constructed from marine grade aluminum with an acrylic diffuser.



**Housing** Die formed aluminum with welded seams.

**Lens** Prismatic acrylic.

**Lens frame** Seamless extruded aluminum with piano hinge and spring loaded quarter turn closure fasteners.

**Finish** White, powder coat polyester, inside and out, phosphate pretreated to ensure superior adhesion and rust resistance.

**Ballast** Standard universal 120-277 VAC, 50/60 Hz, electronic ballast (consult factory for other options).

**Mounting** Includes shock resistant brackets and liquid tight cord grip

### Features

- » 2' or 4' fixture lengths
- » 1, 2, or 3 lamp combination
- » Drip-proof recessed light fixture
- » UL 1598A marine
- » IP 54
- » U.S.C.G. - ABS


### Applications


- » "T" grid ceiling
- » Accommodations
- » Large open areas
- » Passageways
- » Work stations

**Dimensions** *dimensions and specifications subject to change without notification*

Weight: 4 ft. with electronic ballast = 16 lbs. (7.3 kg)

2 ft. with electronic ballast = 10 lbs. (4.5 kg)

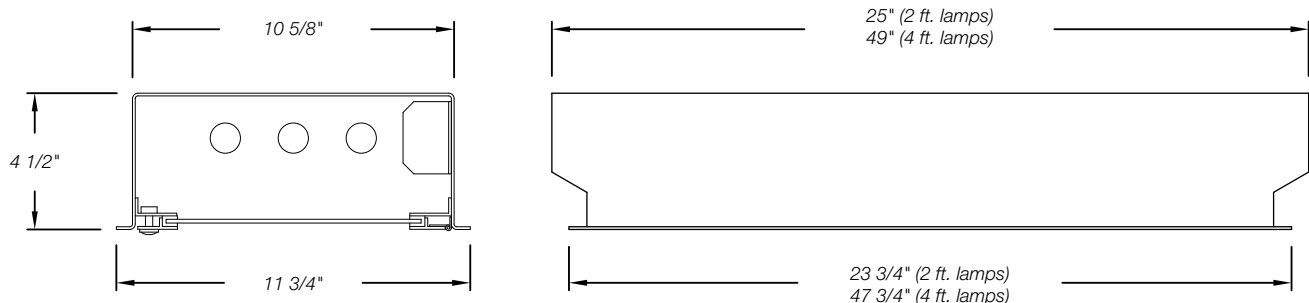



**1 Lamp type**

<b>17</b>	<i>17W T8, (2 ft)</i>
<b>28</b>	<i>28W T5, (4 ft)</i>
<b>32</b>	<i>32W T8, (4 ft)</i>
<b>54</b>	<i>54W T5 HO, (4 ft) (2 lamp max)</i>

**2 Lamp quantity**

<b>1</b>	<i>One</i>
<b>2</b>	<i>Two</i>
<b>3</b>	<i>Three</i>

**Options**

<b>E1</b>	<i>One lamp emergency service</i>
<b>E2</b>	<i>Two lamp emergency service</i>
<b>SJO</b>	<i>10' of 16/3 cable, prewired</i>
<b>DC</b>	<i>12/24 Volt DC</i>
<b>2C</b>	<i>Two circuit wired</i>
