

**intent**

The MXT series is designed to mark the exits of seaborne vessels and offshore platforms. Its drop in exit stencil includes pop-out wayfinding arrows.

mounting

Surface mounts to ceilings or walls via a mounting canopy.

light source

Supplied with two compact fluorescent 7 W lamps.

lens

0.25 in. Polycarbonate lens secured on all sides.

housing

Made from 0.90 sheet aluminum die formed to shape with seams welded and ground smooth.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance.

hardware

Recessed stainless steel screws provide luminaire access.

emergency power

90 minute emergency powered units include a nickel cadmium battery, two miniature wedge base lamps, and 120/277 dual voltage solid state charger with power indicator lights and test switch.

weightSingle face:


10 lb. (4.5 kg) each

Double face:

13 lb. (5.9 kg) each

certifications

Wet location 924 ETL listed and IP 65 rated. This sign meets or exceeds requirements as established by the national electric code, article 700.

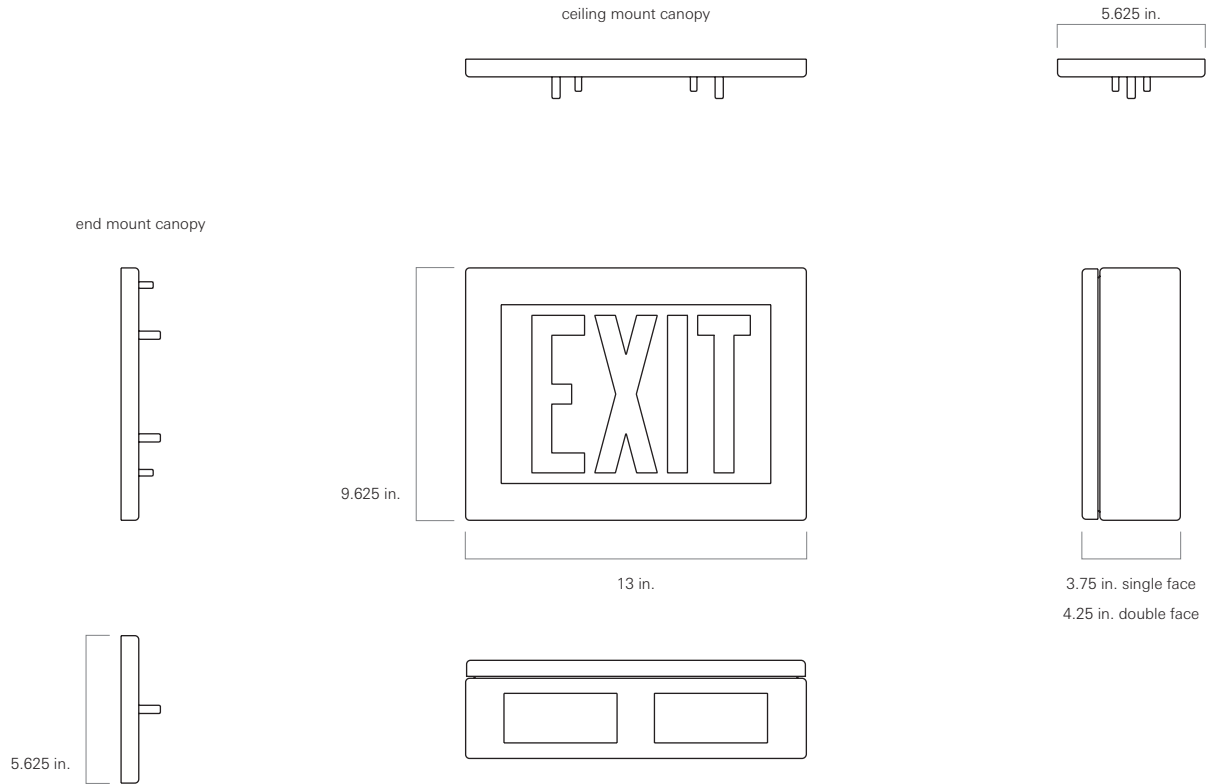

- | | | | | | |
|--------------|------------------------|-------------|----------------------|--------------|---|
| one | material | four | face quantity | six | mounting |
| A | aluminum | S | single face | C | ceiling |
| | | D | double face | E | end |
| two | finish | | | W | wall and surface |
| W | white | five | letter color | seven | options |
| | | R | red | EM | emergency battery power |
| three | voltage (60 Hz) | G | green | F | emergency mode flasher with battery power |
| 120 | 120 V | | | | |