



PRODUCT SPECIFICATION

The SRW series is designed for step lighting in high abuse environments. It resists damage from physical shock and vibration.

Mounting

Mounts recessed in step or wall.

Light Source

Supplied with a 12 in. 8 W T5 bipin fluorescent lamp.

Lens

Acrylic or polycarbonate lens held captive between housing and door.

Housing and Door

Made from cast aluminum.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Recessed, stainless steel, tamper-proof fasteners.

Certifications



UL listed damp or wet location.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

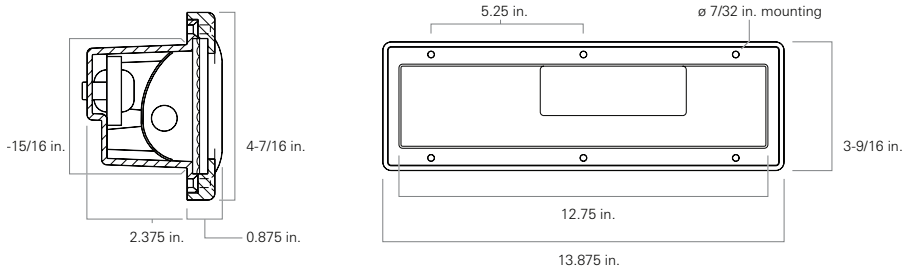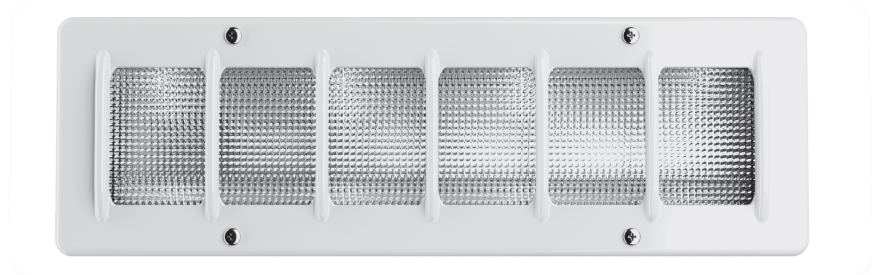

one Door Finish

- H Polished
- R Brushed matte
- W White, std

two Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

three Lenses

- 12/00 .125 in. prismatic polycarbonate with neoprene gasket.
- 53/00 .125 in. prismatic acrylic with neoprene gasket.
- 53/32 .125 in. prismatic acrylic with .250 in polycarbonate.

four Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

five UL listing

- W Wet location

six Options

- CU Canadian UL Listing
- FH Fuse and holder

Modifications are available to meet custom requirements.