



PRODUCT SPECIFICATION

The STP series is designed for step and detail lighting in high abuse environments.

Mounting

Mounts recessed in step or wall.

Housing

16 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

Door

18 gauge one piece, die formed cold rolled steel. Aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

Hardware

Stainless steel, tamper-proof door fasteners. A mounting bracket and mounting screws are provided.

Wiring

All electrical components are mounted to a removable wireway for easy wiring.

Certifications



UL Listed wet location.

Job Name _____


Fixture Type _____

Catalog No. _____


Approval _____ Date _____

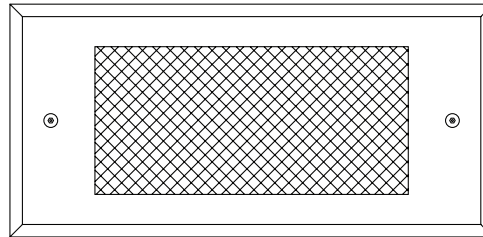

louvered door option

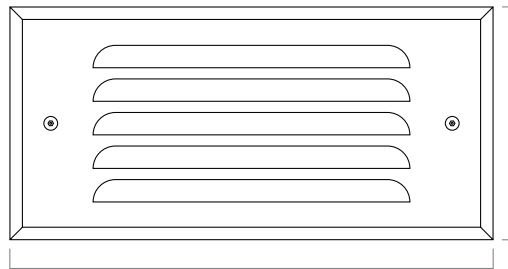

6.5 in.



4.125 in.

13.5 in.

3.5 in.



one Lamps (not included)

- 07 7 W T4 TT PL
- 09 9 W T4 TT PL
- 13 13 W T4 TT PL

two Material

- A Aluminum
- C Cold rolled steel
- S Stainless steel

three Door Finish

- R Brushed stainless steel
- W White

four Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

five Ballast

- PH Preheat, std
- HP High power factor

six Lens

- 52 .125 in. white acrylic
- 53 .125 in. K12 prismatic acrylic
- 12 .125 in. K12 prismatic polycarbonate
- 00 none, only with louvered door option

seven Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

eight Options

- CU Canadian UL Listing
- E1 One lamp emergency ballast
- LD Louvered door

Modifications are available to meet custom requirements.