



## PRODUCT SPECIFICATION

The UCF series is designed for under-cabinet lighting in high abuse environments.

### Mounting

Surface mounts underneath cabinets. Knockouts on both ends permit continuous fixture mounting.

### Lens

One piece, vandal resistant, .156 in., extruded, UV satbilized, prismatic polycarbonate lens.

### Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

### Hardware

Stainless steel, tamper-proof fasteners.

### Certifications




UL Listed damp or wet location. IP43 rated. Covered ceilings only.

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

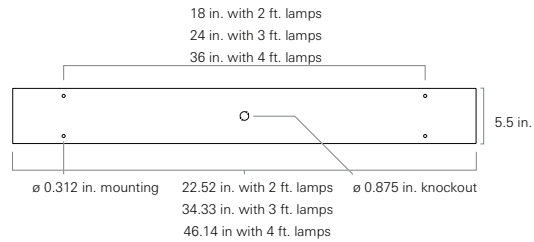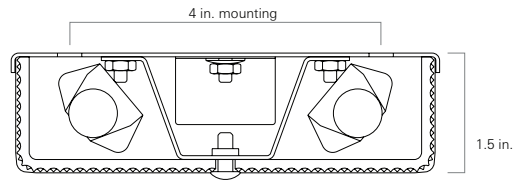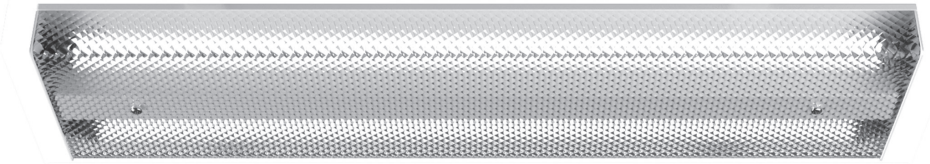

- one Lamps (not included)**
- 14 2 ft. 14 W T5
  - 21 3 ft. 21 W T5
  - 28 4 ft. 28 W T5
  - 54 4 ft. 54 W T5 HO

- two Material**
- A Aluminum
  - C Cold rolled steel
  - S Stainless steel

- three Finish**
- R Brushed stainless steel
  - W White

- four Voltage**
- 120 120 V, 60 Hz
  - 277 277 V, 60 Hz
  - 347 347 V, 60 Hz
  - VAR Variable, 120-277 V, 50/60Hz

- five Ballast**
- DM Dimming
  - PR Program Rapid Start, std

- six Fasteners**
- AP Stainless steel allen head with pin
  - TP Stainless steel torx head with pin
  - PH Phillips, non-security

- seven UL Listings**
- D Damp location
  - W Wet location

- eight Options**
- 2C Two-circuit wired
  - CU Canadian UL Listing
  - FH Fuse and holder
  - LL Lamp locks

Modifications are available to meet custom requirements.