



UCF8

High Abuse Surface Mount Fluorescent Under-Cabinet

PRODUCT SPECIFICATION

The UCF8 series is designed for under-cabinet lighting in high abuse environments.

Mounting

Surface mounts underneath cabinet. Knockouts on both ends permit continuous fixture mounting.

Lens

One piece, vandal resistant, .156 in., extruded, UV stabilized, prismatic polycarbonate lens.

Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

Hardware

Stainless steel, tamper-proof fasteners.

Certifications



UL Listed damp or wet location. IP43 rated. Covered ceilings only.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

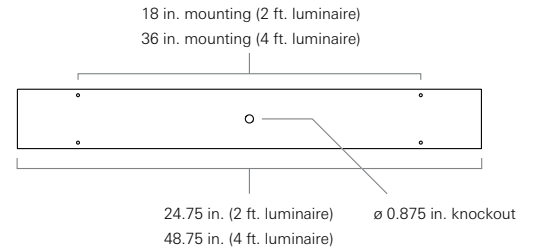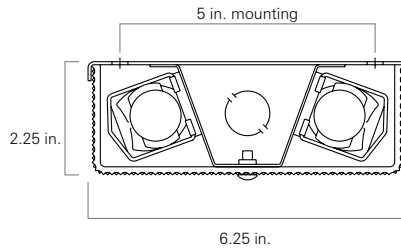

one Lamps (not included)
 17 2 ft. 17 W T8
 32 4 ft. 32 W T8

two Material
 A Aluminum
 C Cold rolled steel
 S Stainless steel

three Finish
 R Brushed stainless steel
 W White

four Voltage
 120 120 V, 60 Hz
 277 277 V, 60 Hz
 347 347 V, 60 Hz
 VAR Variable, 120-277 V, 50/60Hz

five Ballast
 DM Dimming
 EL Electronic Instant Start, std
 PR Program Rapid Start

six Fasteners
 AP Stainless steel allen head with pin
 TP Stainless steel torx head with pin
 PH Phillips, non-security

seven UL Listings
 D Damp location
 W Wet location

eight Options
 2C Two-circuit wired
 CU Canadian UL Listing
 FH Fuse and holder

Modifications are available to meet custom requirements.