



UCF-LED

High Abuse Surface Mount **LED** Under-Cabinet

PRODUCT SPECIFICATION

The UCF series is designed for under-cabinet lighting in high abuse environments.

Mounting

Surface mounts underneath cabinets. Knockouts on both ends permit continuous fixture mounting.

Lens

One piece, vandal resistant, .156 in., extruded, UV satbilized, prismatic polycarbonate lens.

Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

Hardware

Stainless steel, tamper-proof fasteners.

Driver

0-10Vdc dimming, Range 10%-100%
-40°C Min. starting temperature, >0.9 PF, <20% THD

Wiring

Driver provided with pre-wired 3-wire self-aligning input power quick disconnect and 2-wire quick disconnect to LED module.

Certifications




UL Listed damp or wet location. IP43 rated.
Covered ceilings only.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

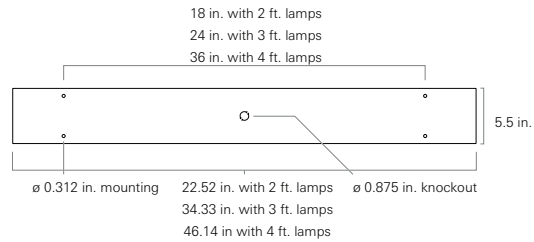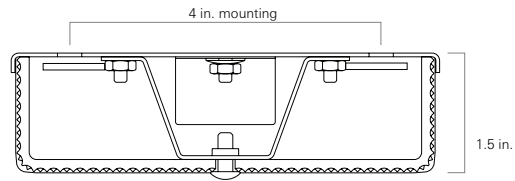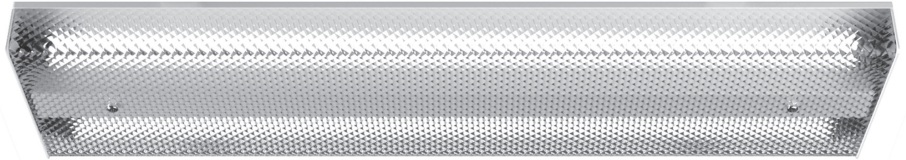

one Luminaire Size
2 2 ft fixture
4 4 ft fixture

two LED Rows
2L Two

three Color Temperature
35 3500K
40 4000K
50 5000K

four Material
A Aluminum
C Cold rolled steel
S Stainless steel

five Finish
R Brushed stainless steel
W White

six Voltage
120 120 V, 60 Hz
277 277 V, 60 Hz
VAR Variable, 120-277 V, 50/60Hz

seven Driver
DM 0-10Vdc Dimming, standard

eight Fasteners
AP Stainless steel allen head with pin
TP Stainless steel torx head with pin
PH Phillips, non-security

nine UL Listings
D Damp location
W Wet location

ten Options
SO Specified output*
2C Two-circuit wired
CU Canadian UL Listing
FH Fuse and holder

* Indicated as SO(xx/xxxx). Specified output, Input watts / delivered lumens to be determined based on specified requirements.

Modifications are available to meet custom requirements.