



## PRODUCT SPECIFICATION

The VSA is designed for general purpose lighting in high abuse areas where an architectural look is required.

### Mounting

Surface mounts to ceilings or walls.

### Housing

Marine grade aluminum extruded housing and die-cast end caps.

### Lens Frame

Marine grade aluminum extruded side rails and die-cast ends captivates lens.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

### Lens

.125 in. thick extruded polycarbonate snap-fits into lens frame for ease of replacement.

### Gasket

Closed cell foam gasket continuously seals lens frame to housing for up to IP67 rating.

### Fasteners

Stainless steel, tamperproof fasteners finished to match housing.

### Certifications

UL Listed wet location. Covered ceilings only. IP65 Rated, optional IP66 and IP67 Ratings available. Constructed to pass MIL-S-901 Grade A, Type A, High Impact Shock Test and MIL-S-167 Type 1, Vibration Test.





Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

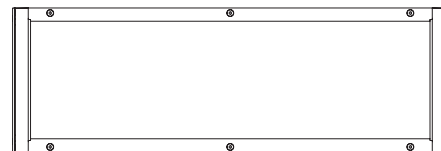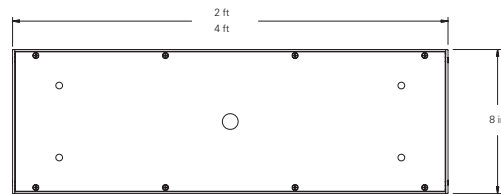

### one Lamps (not included)

- 14 2 ft. 14 W T5
- 24 2 ft. 24 W T5 HO
- 28 4 ft. 28 W T5
- 54 4 ft. 54 W T5 HO

### two Lamp Quantity

- 2 Two
- 3 Three

### three Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347V, 60Hz
- VAR Variable, 120-277 V, 50/60Hz

### four Ballast

- DM Dimming
- PR Program Rapid Start, standard

### five Lens

- OP Opal polycarbonate, standard

### six Finish

- WH White, standard
- BK Black
- BZ Bronze

### seven Fasteners

- TP Torx head, standard
- PH Phillips head

### eight UL Listing

- 65 IP65 Rated, standard
- 66 IP66 Rated
- 67 IP67 Rated (Natorium<sup>1</sup>)  
*<sup>1</sup>IP67 Rated option suitable for use in Natorium application*

### nine Options

- 2C Two circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- FH Fuse holder
- NL-LED LED night light
- PC Photocell
- IMS Integral Occ Sensor
- CM Corner mounting bracket

Modifications are available to meet custom requirements.