

# US NAVY MIL SPEC LIGHTING

## MIL-F-16377/9 Overhead Lighting

The L.C. Doane Company  
202 Series, 3 Lamp Fixture

This watertight fluorescent lighting fixture is for general lighting. The housing is constructed from marine grade aluminum. Available with either a white diffusing or a clear and white prismatic 1/4" thick window.


120 volts, 60 Hertz. Supplied with three 8W T5 cool white lamps and ten feet of cable.

### Standard Mounting


Overall Dimensions: 16-5/16" X 7-5/8" X 3-1/2".  
Net weight: 7 lbs. 7 oz. maximum.  
Approximate shipping weight for package of eight: 64 lbs.

### Flush Mounting

Overall Dimensions: 18-11/16" X 9-15/16" X 3-1/2".  
Net weight: 8 lbs. 11 oz. maximum.  
Approximate shipping weight for package of eight: 75 lbs.

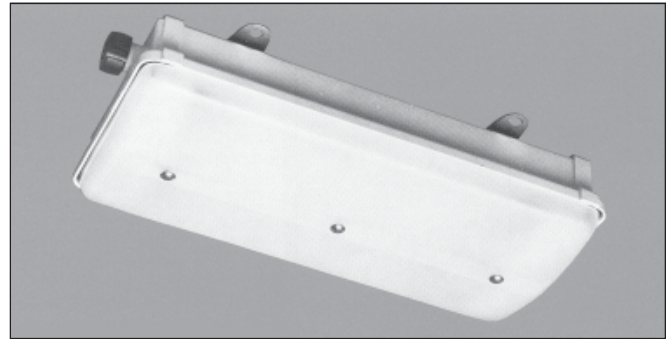

**M16377/9-73.3** **NSN 6210-00-295-2880**  
Standard Mount, White Diffusing Lens Window

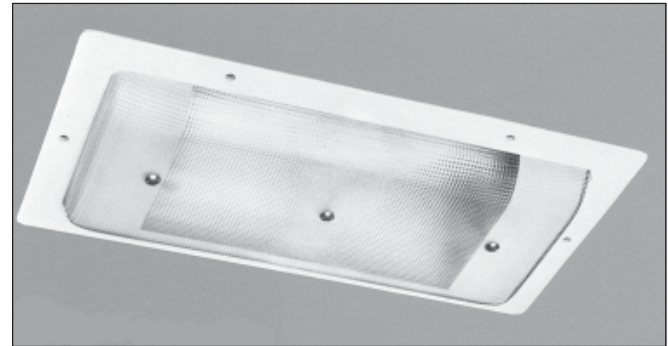

**M16377/9-346.3** **NSN 6210-01-186-9957**  
Flush Mount, Clear/White Prismatic Window

### How To Order By Military Spec Number

Example: M16377/9-73.3 (Refer to the Index pages for crosses to NSN numbers)

MIL SPEC NUMBER	SYMBOL NUMBER	OPTIONAL (EACH) LAMP FILTER TUBE	OPTIONAL SWITCH (DPST)	OTHER OPTION Specify
M16377/9	73.3 = Standard Mount White Diffusing Window	R = Red B = Blue Y = Amber	S = One Switch SS = Two Switches	A1 = Amendment 1, Low Smoke Cable
	73.4 = Flush Mount White Diffusing Window	G1.0 = Grey 1.0% G2.5 = Grey 2.5%		
	346.2 = Standard Mount Clear and White Prismatic Window			
	346.3 = Flush Mount Clear and White Prismatic Window			

### On Board Repair Parts For MIL-F-16377/9, 3 Lamp Fixtures

For other available on board repair parts refer to the Repair Parts page.

ITEM DESCRIPTION	L.C. DOANE PART NUMBER	MILITARY NUMBER	NSN NUMBER
WHITE DIFFUSING WINDOW	B-1704-NS	M16377/9-001	6210-00-548-0214
CLEAR/WHITE PRISMATIC WINDOW	B-1721-NS	M16377/9-003	6210-00-312-0377
SHOCKMOUNT	B-1591-AS	M16377/41-010	6210-00-973-1748